


# Paramount® Center Draw Assembly With PermaTilt® Wand Control

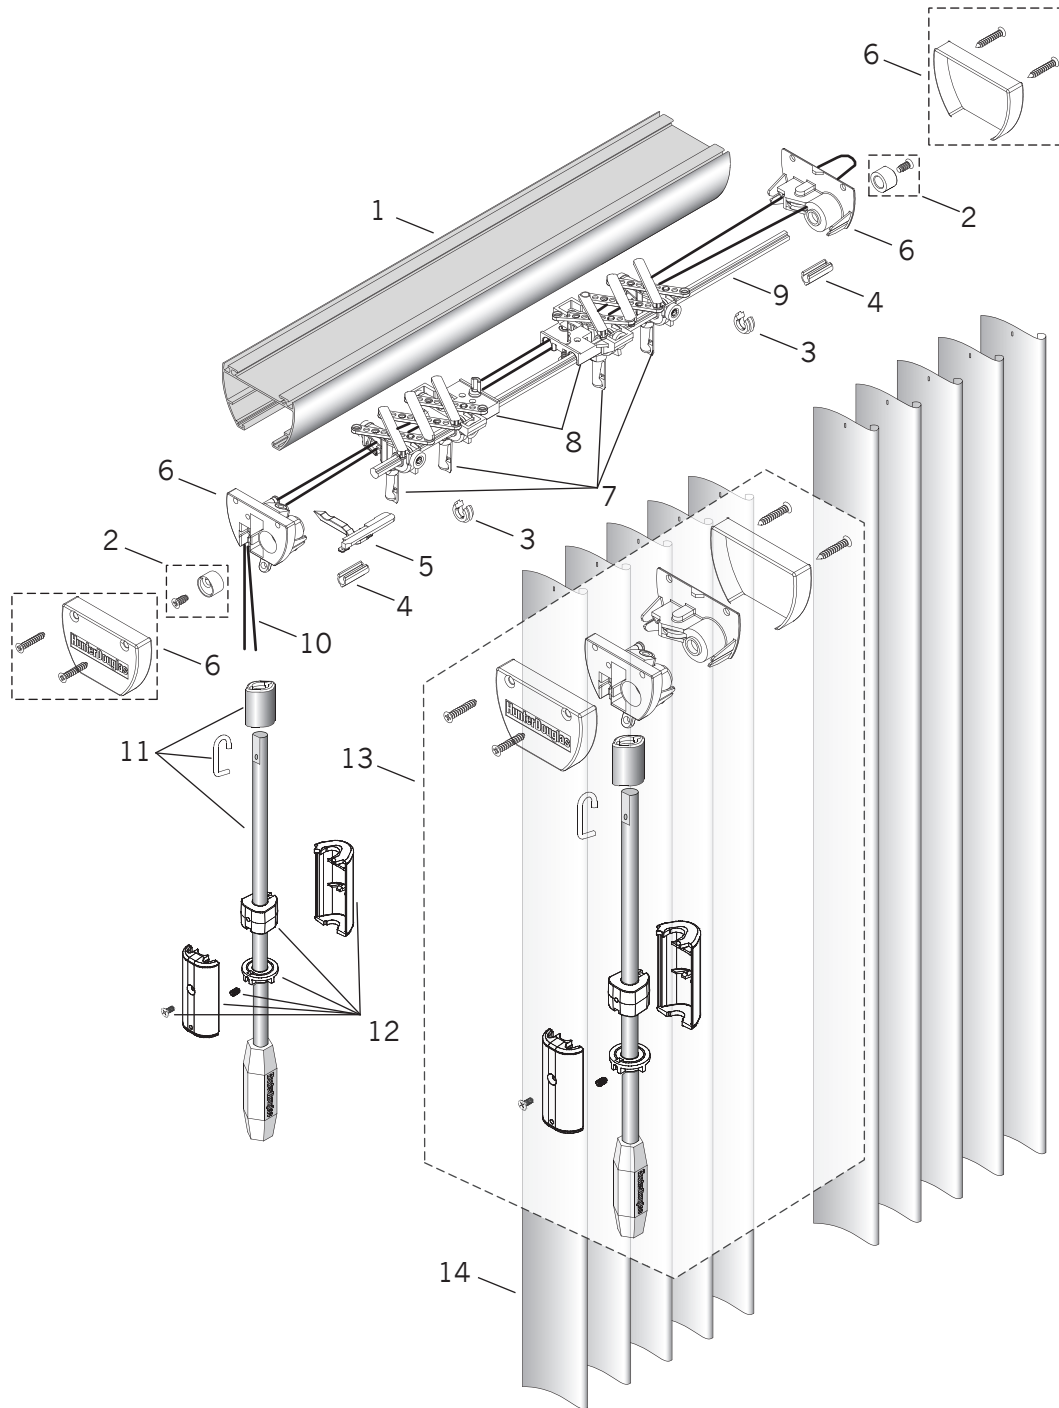

## Standard Parts

- |                                |                                    |   |
|--------------------------------|------------------------------------|---|
| 1. Standard Channel            | 6. PermaTilt® End Control Assembly | 10. Traverse Cord – Natural             |
| 2. Tilt Rod Retention Assembly | 7. 3½" Carrier Assembly            | 11. Wand Assembly                       |
| 3. Stop C-Clip                 | 8. 3½" Lead Carrier Guide          | 12. PermaTilt Wand Cord Tether Assembly |
| 4. 1½" Omega Spacer            | 9. Tilt Rod                        | 13. PermaTilt Wand Kit                  |
| 5. Tilt Rod Support Assembly   |                                    | 14. Louvers                             |

## Paramount® Center Draw Assembly With PermaTilt® Wand Control

<b>No.</b>	<b>PCN</b>	<b>Description</b>
1.	7799860	Standard Channel (16') – Ivory Whisper
2.	97840	Tilt Rod Retention Assembly
3.	97841	Stop C-Clip
4.	97842	1½" Omega Spacer
5.	7700827	Tilt Rod Support Assembly
6.	7700810	PermaTilt® End Control – Ivory Whisper
7.	7700821	3½" Carrier Assembly
8.	7700826	3½" Lead Carrier Guide
9.	97890	Tilt Rod (16')
10.	PS0563B	Traverse Cord – Natural
11.	7704800	Wand Assembly – 38" Ivory
	7704801	Wand Assembly – 48" Ivory
	IWND0501	Wand Assembly – 60" Ivory
12.	7702811	PermaTilt Wand Cord Tether Assembly – Ivory
13.	7704805	PermaTilt Wand Kit – 38" Ivory
	7704806	PermaTilt Wand Kit – 48" Ivory
	7702818	PermaTilt Wand Kit – 60" Ivory
14.	N/A	Louvers