


# INSTALLATION AND CARE INSTRUCTIONS

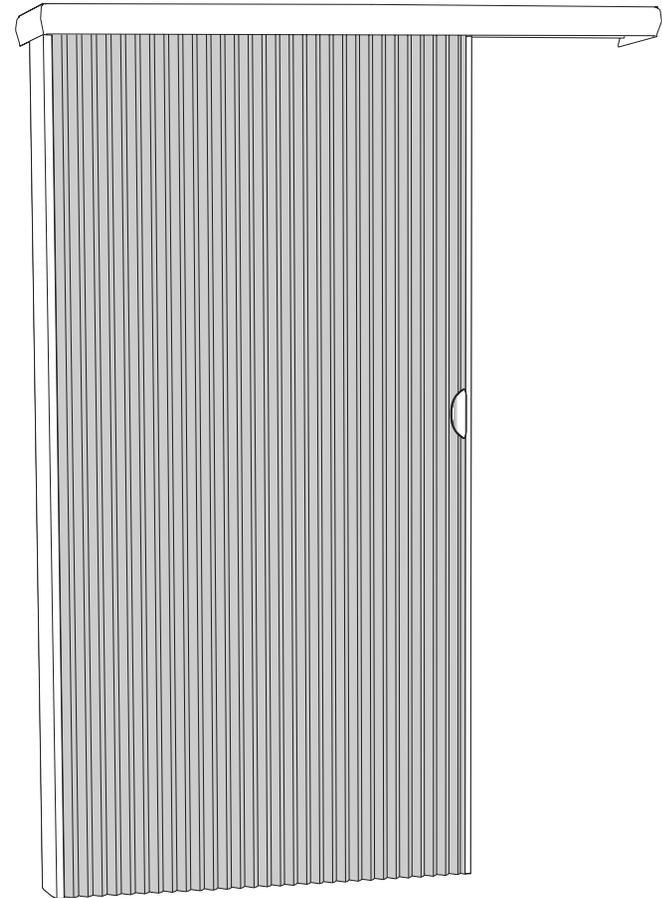

Vertical Applications  
Honeycomb Shades

## CONTENTS

Introduction .....	2
Before You Begin .....	3
Vertical Application Parts Overview.....	4
Materials Required .....	5
Tools Required .....	6
Outside Mount Installation.....	7
Outside Mount - Bracket Installation .....	8
Outside Mount - Headrail Installation .....	10
Outside Mount - Vertical Rails Installation .....	10
Outside Mount - Stationary Rail Bottom Bracket Attachment .....	18
Inside And Ceiling Mount Installation.....	19
Inside Mount - Bracket Installation.....	20
Inside Mount - Headrail Preparation .....	22
Inside Mount - Headrail Installation.....	26
Inside Mount - Vertical Rails Installation .....	27
Inside Mount - Stationary Rail Bottom Bracket Attachment.....	31
Traditional (On The Floor) Inside And Outside Mount Installation.....	33
Traditional Mount - Bracket Installation .....	34
Traditional Mount - Rail Preparation/Installation .....	34
Traditional Mount - Headrail Installation .....	38
Traditional Mount - Stationary Rail Bottom Bracket Attachment .....	40
Final Adjustments .....	43
Shade Adjustment .....	44
Valance And Handle(s) Attachment.....	46
Care And Cleaning .....	48
Troubleshooting Procedures .....	49
Child Safety .....	50

## INTRODUCTION

Thank you for purchasing our Vertical Application product. Your new shade has been custom built for you from the highest quality materials. Once in your window, it will provide you with a lifetime of beauty and trouble-free use.

### Getting Started


- Remove the shade from the package. Keep the packaging until the shade operates to your satisfaction.
- Locate the packaging label attached to the side or end of the shipping carton which contains your shade information.
- Read these instructions all the way through to acquaint yourself with the installation procedures.

## CHILD SAFETY



# WARNING

For more safety information  
call 1-866-662-0666 or go to  
[www.healthcanada.gc.ca/blindcords](http://www.healthcanada.gc.ca/blindcords)



## BEFORE YOU BEGIN

### Determine Your Shade Type

Installation for Vertical Application shades varies based on the design of your shade and the manner in which you are mounting your shade.


Vertical Application Design	# Stationary Rails	# Moving Rails	Install Vertical Rails Into Top Rail In This Order
Left Stack 	1	1	1. Stationary Rail 2. Moving Rail
Right Stack 	1	1	1. Stationary Rail 2. Moving Rail
Split Stack and 2-Fabric Combo 	2	2	1. Left Stationary Rail 2. Left Moving Rail 3. Right Moving Rail 4. Right Stationary Rail
Center Stack 	0	2	1. Left Moving Rail 2. Right Moving Rail

Refer to the packaging label to determine each of the following:

- Determine which Vertical Application design you are installing: left stack, right stack, center stack, or split stack (center opening).
- Determine if your shade is an inside mount (IB-mounting inside the window casement), outside mount (OB-mounting outside the window casement), or ceiling mount (IB-mounting directly into the ceiling).

## VERTICAL APPLICATION PARTS OVERVIEW

### Left Stack Shown

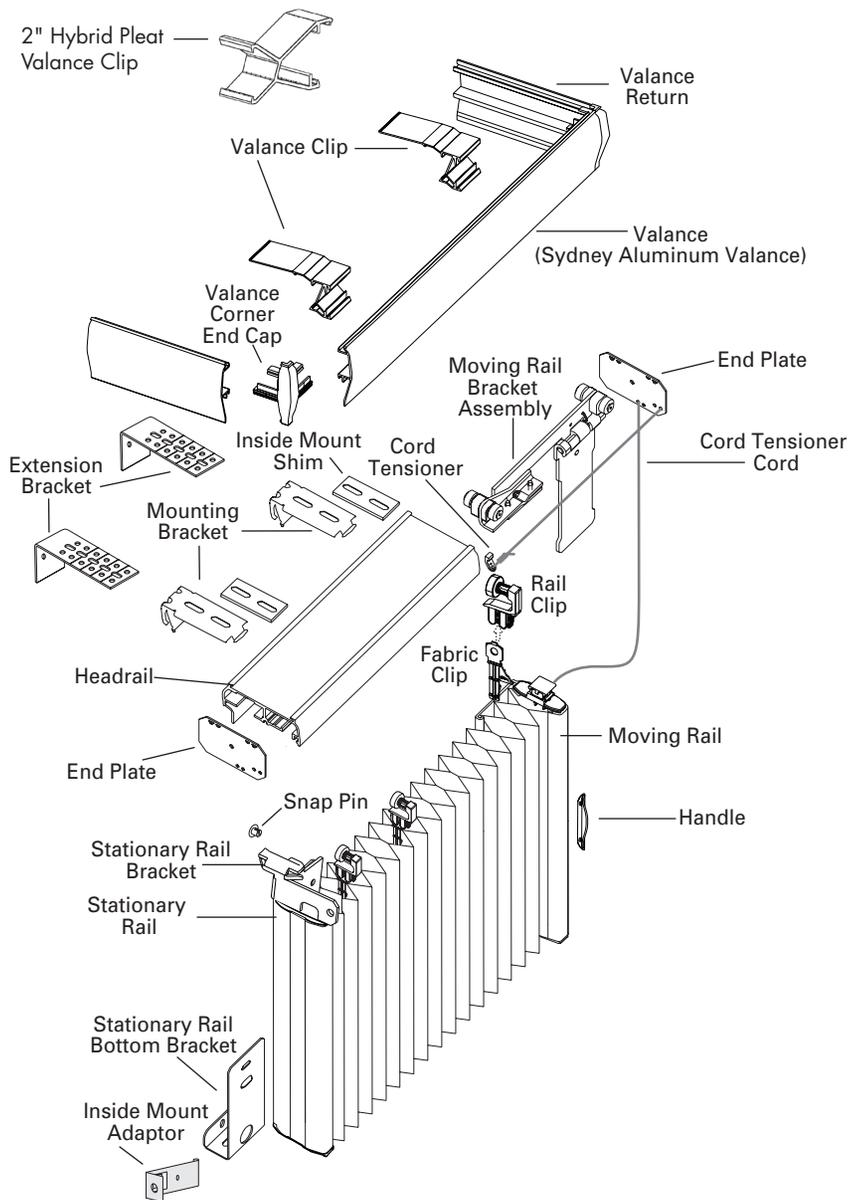

## TROUBLESHOOTING PROCEDURES

### Problem

### Symptom/Solution

The shade binds or moves with difficulty.

- If the shade does not slide with ease, you may need to adjust the cord tension. Slide the cord tensioner away from the fabric stack slightly to decrease the tension.
- Check that the cord is not pinched.

The shade does not stay in position.

- If the shade does not stay in position, you may need to adjust the cord tension. Slide the cord tensioner toward the fabric stack slightly to increase the tension.

The shade is not vertically aligned.

- Adjust the screws on the moving rail. To move the bottom of the rail to the right, loosen the left screw 1/2 turn and tighten the right screw 1/2 turn. To move the bottom of the moving rail to the left, reverse the process and loosen the right screw as you tighten the left.


The installation brackets do not allow enough clearance for the shade (to clear moldings or window cranks).

- Use an extension bracket or spacer blocks for mounting each installation bracket to allow adequate clearance for your shade.

A fabric carrier needs to be reattached.

- Place each carrier between a pair of fabric cells.

- Align the hole in the fabric carrier with the hole in the fabric cells.



- Snap the carrier closed by pinching the two pieces of the carrier together from top to bottom.

The cord tensioner does not lock into place.

- Using a small 1/8" flat blade screwdriver, scrape the paint from the inside of the channel used for the cord tensioner.

## CARE AND CLEANING

Honeycomb shades are made of an anti-static, dust-resistant fabric which repels dirt and dust.

### Dusting


Regular light dusting with a feather duster is all the cleaning that is needed in most circumstances.

### Vacuuming

Use a hand-held vacuum with low suction for more thorough dust removal.

### Spot-Cleaning

- Prepare a solution of warm water and a mild detergent.
- Dampen a clean cloth in the solution and wring it out.
- Dab the spot with the dampened cloth until it is gone. Do not rub the fabric.
- Allow the shade to dry in the completely extended position (a closed shade).



### Ultrasonic Cleaning

- Specify that a mild detergent solution be used.
- Never immerse the side rails in the solution.
- Dry the shade completely in the extended position (a closed shade).

CAUTION: Do not ultrasonically clean Serenity or Opulence Blackout fabrics.

### Injection/Extraction


Honeycomb fabric can be professionally cleaned using the injection/extraction method.

- The "dry method" is required for Serenity or Opulence Blackout fabrics.


## MATERIALS REQUIRED

### Materials Supplied With The Order

Check to make sure you have all the materials listed for the number of shades you are installing and for the type(s) of installation. The contents of your hardware package may vary depending upon how the shade was ordered and whether the shade is mounted inside or outside the window or door opening.


Component	Number Required Per Shade (Based On Shade Width)				
	18" to 31"	31 <sup>1</sup> / <sub>8</sub> " to 66"	66 <sup>1</sup> / <sub>8</sub> " to 96"	96 <sup>1</sup> / <sub>8</sub> " to 139"	139 <sup>1</sup> / <sub>8</sub> " to 168"
  Installation Brackets      Shim (For Inside Mounts Only)	2	3	4	5	6
 Extension Bracket (Optional)	1 Per Installation Bracket				
 Spacer Block	1-3 Per Installation Bracket				
  2" Hybrid Pleat Valance Clip      Valance Clips	1 Per Installation Bracket				
 Stationary Bottom Rail Bracket	1 Per Stationary Rail (Not Applicable To Center Stack)				
 Inside Mount Adaptor	1 Per Stationary Rail (Inside Mounts Only)				
 Handle and Screws	1 Per Moving Rail				
 Cord Tensioner	1 Per Shade				
 Snap Pin	2 Per Shade (May Be Loose Or Inserted Into The Vertical Rails)				
 Valance Return And Valance Corner (For Outside Mount and Inside Non-Flush Mount)	2 Per Shade (For Outside Mount and Inside Non-Flush Mount)				


## Your Vertical Application Shade As Shipped (Left Stack Shown)

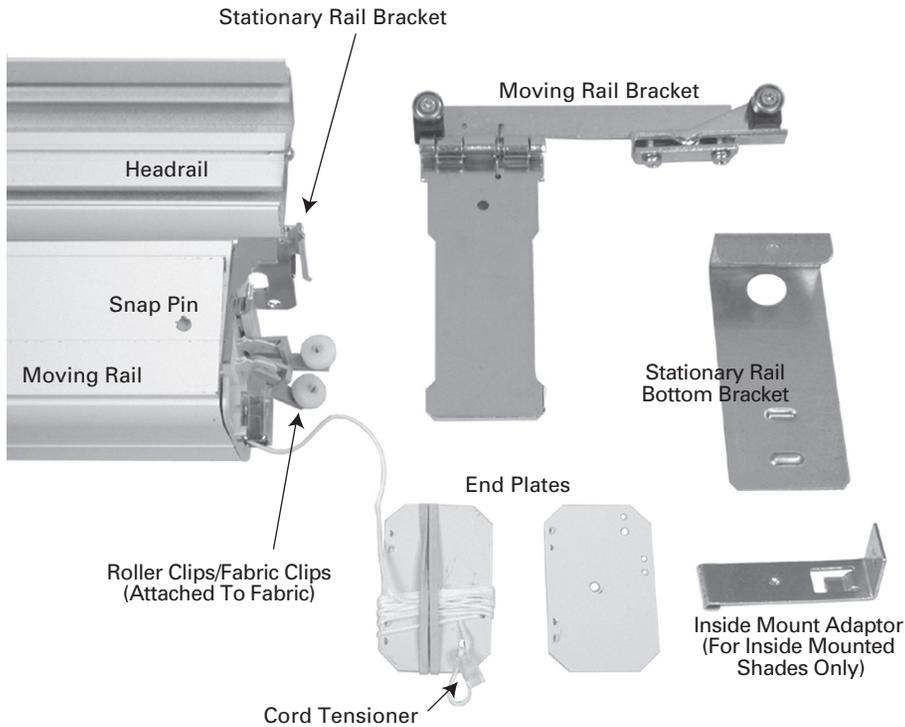

### TOOLS REQUIRED

- Carpenter's Level
- Flat Blade And Phillips Screwdrivers
- Hacksaw
- Measuring Tape
- Pencil
- Scissors
- Variable Speed Drill With Assorted Drill Bits

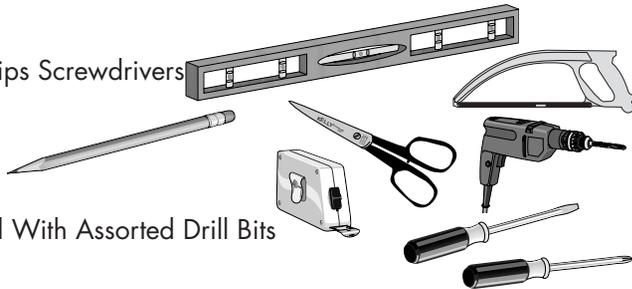

Mounting Surface	Fastener
Wood	No. 6 Hex Head Screws (Provided) 
Drywall, Plaster	Wall Anchors, Expansion Bolts (Not Provided) 
Metal	Sheet Metal Screws (Not Provided) 

## Attach The Handle(s)


- Position the handle so the holes on the flat portion of the handle are aligned with the screw holes on the moving rail. The curve of the handle should face out, away from the fabric.
- Attach each handle to its moving rail using the provided screws. Holes are pre-drilled into each moving rail.



## Headrail Removal

Should the need arise, the headrail can be easily removed.

- Remove the valance.
- While holding the headrail assembly, push back on the bottom tab of the mounting bracket to release the bottom edge of the headrail.
- Roll the back of the headrail downward and out from the bracket.

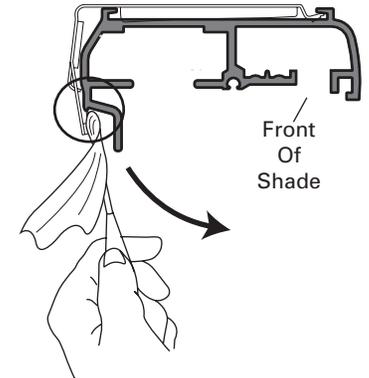



**CAUTION:** Because the bracket is stiff, the headrail may be difficult to remove. Use a flat blade screwdriver wrapped in a soft cloth. Push the blade against the bottom tab of the mounting bracket and twist slightly to pop the rail off the bracket.

Be careful not to scratch the finish on the back of the headrail.

## VALANCE AND HANDLE(S) ATTACHMENT

### Finish Attaching The Valance Clips

Snap the ends of the valance clips under the edge of the headrail.

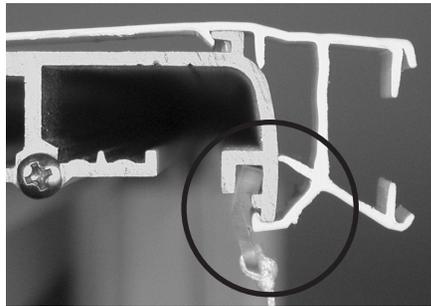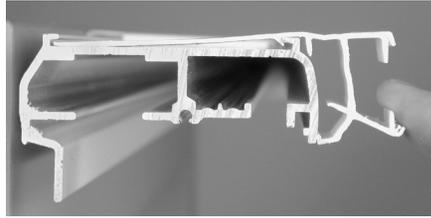


### Assemble And Attach The Valance

#### Valance

- Outside mounts and non-flush inside mounts only: Attach the valance return and the valance corner end cap to each end of the valance.
- Slide the valance up into the top of the valance clips.
- Rotate the valance down to snap it into place.

Tip: Tap the valance at each clip to snap the valance onto the clips.

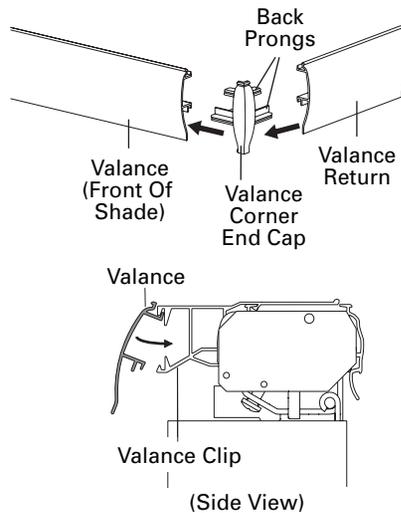

## OUTSIDE MOUNT INSTALLATION

For inside and ceiling mount installations, see page 19.


For traditional (*on the floor*) inside and outside mount installations, see page 33.

# OUTSIDE MOUNT – BRACKET INSTALLATION

## Mount The Brackets

### Bracket Spacing

- Measure and mark where to attach the installation brackets. Place installation brackets 8" in from the ends of the shade.
- Space additional brackets evenly between the two end brackets.

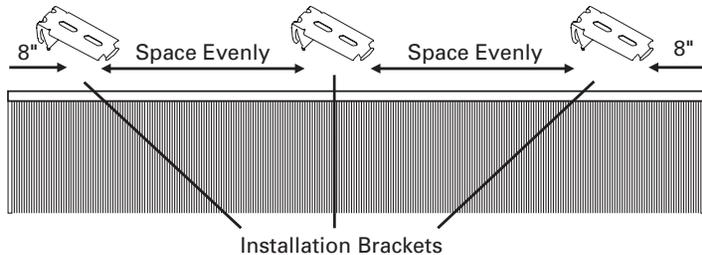

### Outside Mount



Place the top of the mounting bracket a minimum of 5/8" from the top of the window opening.

Note: When mounting to drywall, you must use a wall anchor.

Note: To locate where to place the top of the bracket, take the ordered shade height and add to it the desired floor clearance.

The shade height can be found on the packaging label. If no label exists, contact your dealer.


- Use a carpenter's level to ensure that the brackets are level and aligned.

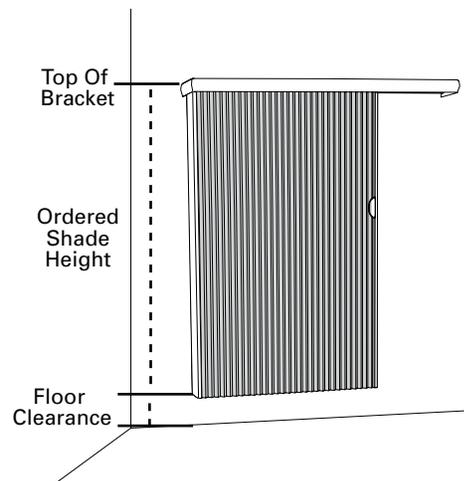

### Adjust The Vertical Alignment


Check to see if the vertical rail is aligned. If not, locate the adjusting lever on the moving rail bracket.

Tip: When adjusting the moving rail, it is much easier to adjust if the cord tension is minimal. To fine-tune the adjustments, do not loosen the tension. Loosen the tension to make large angle adjustments only.

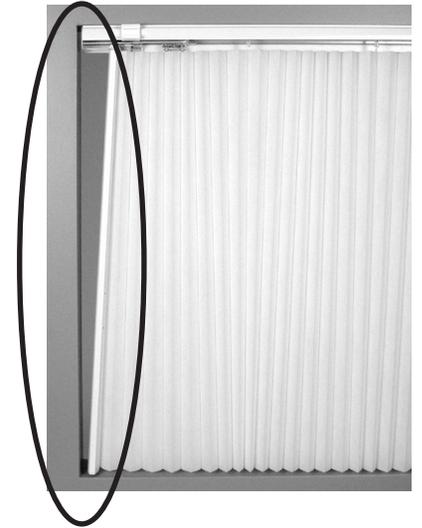


### To Adjust The Bottom End Of The Moving Rail To The Right:

Loosen the left screw 1/2 turn, then tighten the right screw 1/2 turn. Repeat until the shade is properly aligned.

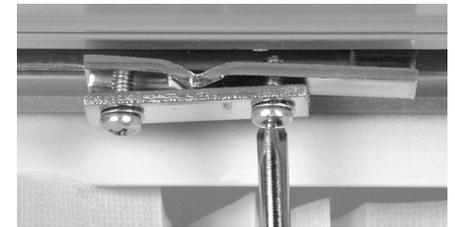

### To Adjust The Bottom Of The Moving Rail To The Left:

Loosen the right screw 1/2 turn, then tighten the left screw 1/2 turn. Repeat until the shade is properly aligned.


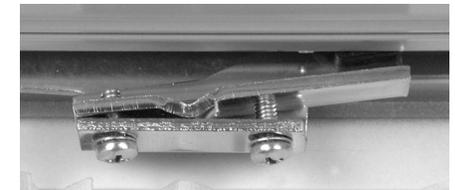


After adjustment, tighten both screws completely.

## SHADE ADJUSTMENT

### Remove Excess Cord

1. Pull on the end of the cord at the cord tensioner to release the slip knot.
2. Pull cord to create tension.
3. Re-tie a knot at the cord tensioner.
4. Trim the excess cord.

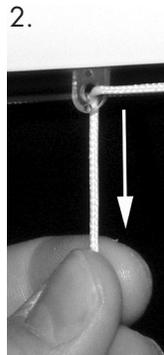

### Adjust The Cord Tension


#### Test The Shade

Move the moving rail to check the shade tension. The moving rail should slide easily, yet there should be enough cord tension to hold the shade in place at any position.

- Decrease the cord tension if the moving rail does not move smoothly.
- Increase the cord tension if the rail does not hold its position.

#### Adjust The Cord Tension


- To tension: slide the cord tensioner away from the end plate until you feel resistance.
- Continue to slide the cord in 1" increments to make the moving rail hold its position. Repeat if necessary.

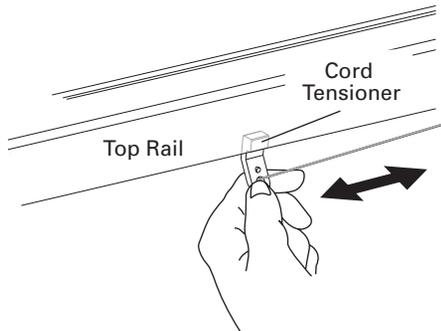

### Outside Mount With Spacer Blocks

Each spacer block projects installation brackets  $\frac{1}{2}$ " away from the mounting surface. Spacer blocks can be useful for above-trim installations.

Place the top of the spacer block a minimum of  $1\frac{1}{8}$ " from the top of the window opening.

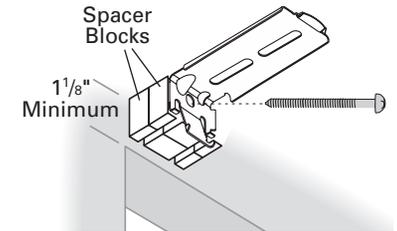

- Position each spacer block with the solid side facing the mounting surface.
- Mounting screws should be long enough to secure the bracket to the mounting surface.
- Use a maximum of three spacer blocks per bracket.

Note: When mounting to drywall, you must use a wall anchor. The supplied screws are not long enough for use with spacer blocks. Please make sure the screws used are long enough to mount the rail securely.

Note: To locate where to place the top of the bracket, review the information under "Outside Mount," bottom of page 8.

### Outside Mount With Extension Brackets


Extension brackets project installation brackets up to 2 1/2" away from the mounting surface, allowing additional clearance for obstructions such as window cranks, handles, and moldings.

- Use a hacksaw to shorten extension brackets at indentations, if needed.
- Use two screws to mount extension brackets.

Note: When mounting to drywall, you must use a wall anchor.

Note: To locate where to place the top of the bracket, review the information under "Outside Mount," bottom of page 8.

- Level and align brackets with a carpenter's level.
- Attach installation brackets to the underside of extension brackets using the machine screws and speed nuts provided.




## OUTSIDE MOUNT – HEADRAIL INSTALLATION

### Install The Headrail

Note: The headrail will not slide in the mounting brackets once installed.

- Measure and mark the centerpoint on the mounting surface.
- Measure and mark the headrail's centerpoint.
- Align the headrail to the matching marks, then install.
  - ~ Slip the headrail into the installation brackets so the front of the bracket slides under the front groove on the top of the rail.
  - ~ Gently roll the back of the headrail up and push back to snap into place.

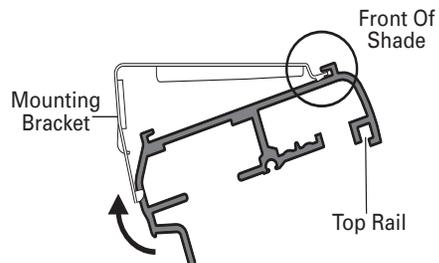


# FINAL ADJUSTMENTS

## OUTSIDE MOUNT – VERTICAL RAILS INSTALLATION

### Prepare The Rails



#### Side Stack (Left And Right) And Split Stack



#### Install The Stationary Rail Bottom Bracket


Note: Do not insert the bracket completely. Leave at least 1/4" of the bracket showing below the stationary rail.

Insert the stationary rail bottom bracket into the bottom of the stationary rail. (For split stack, insert a bottom bracket into each stationary rail.) The base of the bottom bracket should extend toward the window.

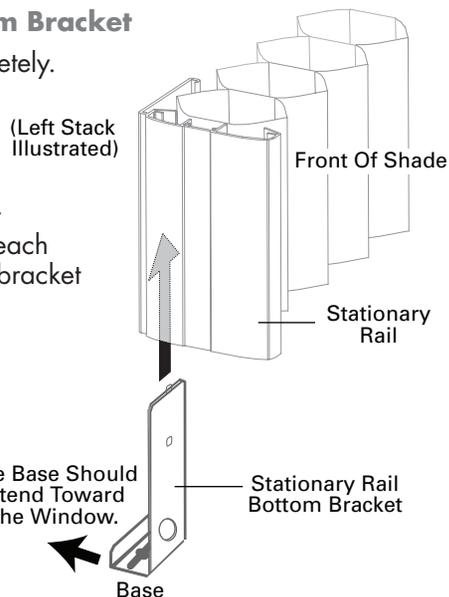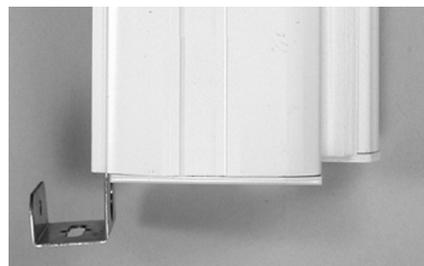




## Assemble The Moving Rail(s)

### Side Stack (Left And Right)



Insert the moving rail bracket into the moving rail.



- If attached, remove the snap pin located in the moving rail.
- Slide the moving rail bracket into the moving rail.
- Replace the snap pin through both the moving rail and the moving rail bracket.

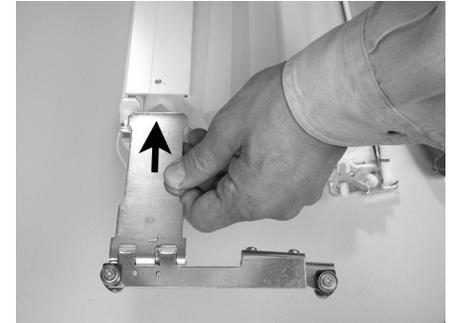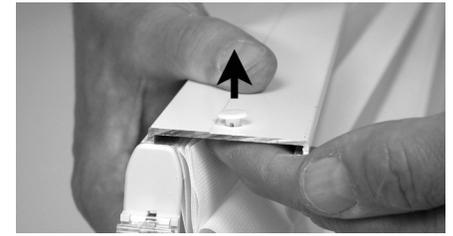

### Center Stack

Insert both moving rail brackets into the moving rails.

- Remove both snap pins located in each moving rail.
- Slide the moving rail bracket into the moving rail.
- Replace the snap pins through both the moving rail and the moving rail bracket.

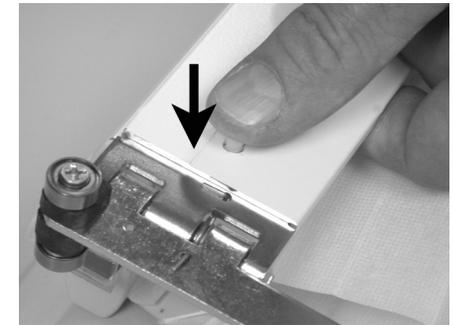


### Split Stack

Insert both moving rail brackets into the moving rails (as shown above).


- Remove both snap pins located in each moving rail.
- Slide the moving rail bracket into the moving rail.
- Replace the snap pins through both the moving rail and the moving rail bracket.

## Install The Vertical Rails

### Side Stack (Left And Right)



1. Remove the end plate from the stationary side of the headrail, if attached (for a left stack, remove the left end plate; for a right stack, remove the right end plate).


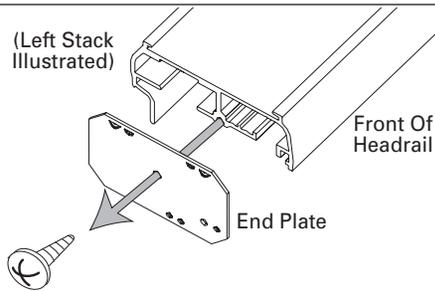


2. Pick up the rails and fabric as one unit and slide the rollers of the moving rail bracket onto the rear track of the headrail.



3. Slide the rail clips onto the appropriate groove in the front track.


- 3/4" fabric – back groove

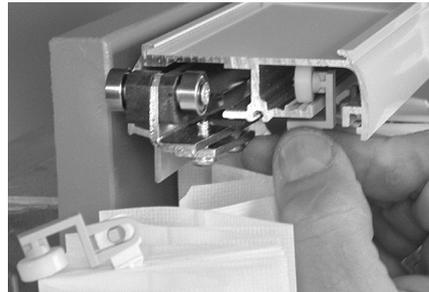


3/4" Fabric Back Groove

## Inside Mount

### Side Stack (Left And Right) And Split Stack




- Use a carpenter's level to ensure the stationary rail is exactly vertical when viewed from both the front and the side.
- Secure the screw through the bracket and into the bottom of the mounting surface. See the next step if you ordered your shade with a cut-out or you prefer to secure the rail to the side.

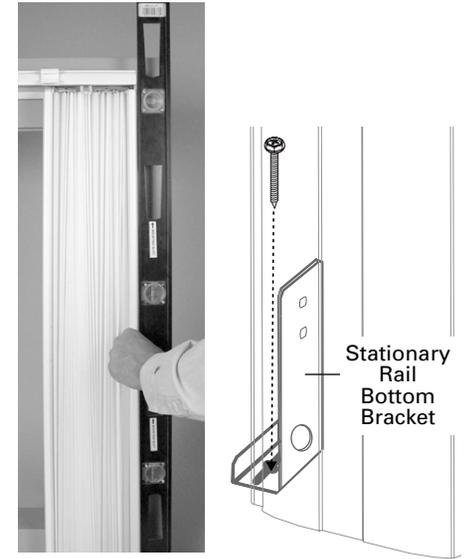

Use the inside mount adaptor to secure the stationary rail to the side of the casement.

Note: If you ordered your shade with a cut-out, such as for baseboards or other obstructions, you must use the inside mount adaptor.


- Align the screw hole of the adaptor to face the window casement (or wall). Slide the inside mount adaptor onto the stationary rail bottom bracket.
- Secure a screw through the inside mount adaptor and into the casement.

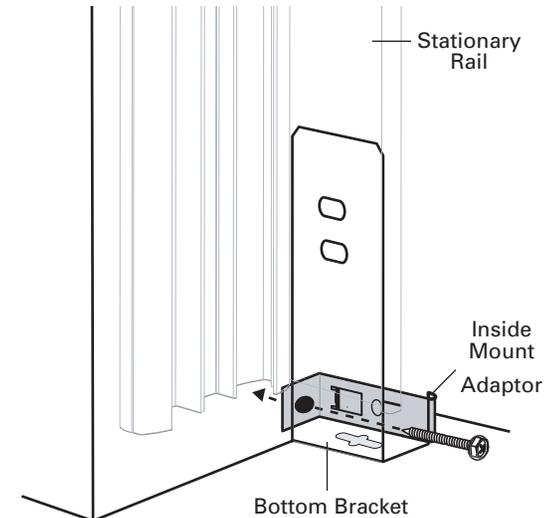


## TRADITIONAL MOUNT — STATIONARY RAIL BOTTOM BRACKET ATTACHMENT

### Outside Mount


#### Side Stack (Left And Right) And Split Stack



- Use a carpenter's level to ensure that the stationary rail is exactly vertical when viewed from both the front and the side.
- Secure the screw through the bracket and into the mounting surface.
- You may use an extension bracket to mount the stationary rail away from the wall. An extension bracket may be necessary if you used spacer blocks with the mounting brackets.

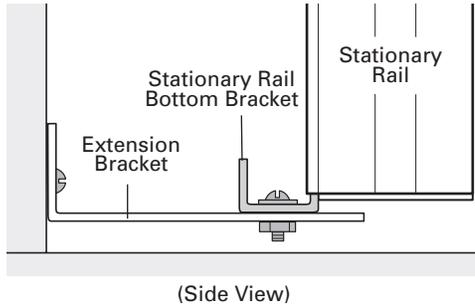


4. Install the stationary rail.
  - The stationary rail bracket has two slots at the top. The back tracks of the headrail fit into these slots.

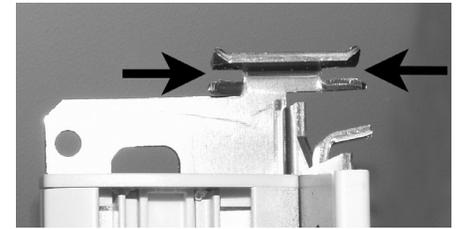


Top Of Stationary Rail Bracket

- Insert the bracket into the back track of the headrail as shown. Twist the rail 90° to lock it in place.

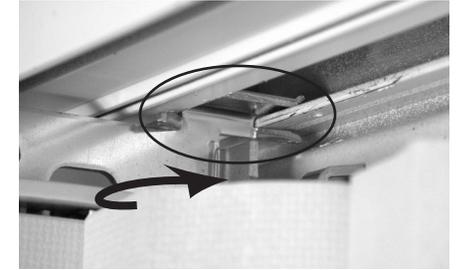


- Make sure the bracket aligns with the end of the headrail.

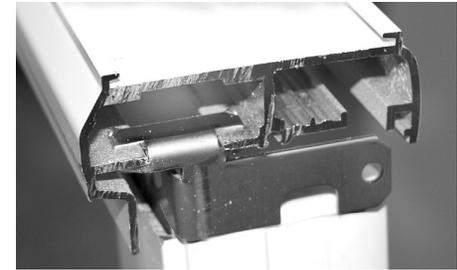

5. Install the cord tensioner.
  - Unwind the cord from the end plate.
  - Slide the cord tensioner into the channel at the front of the headrail.


Note: You will adjust the cord tensioner later.

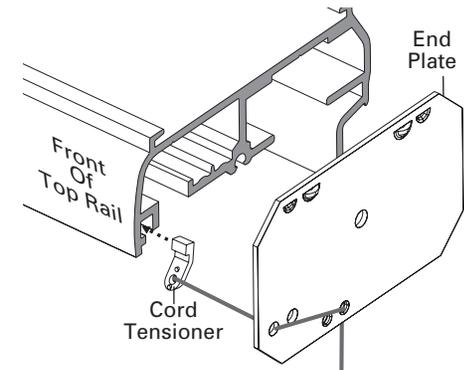


6. Attach the stationary rail side end plate.
7. Attach the moving rail side end plate.




## Center Stack



1. Pick up all the rails and fabric and slide the rollers of the right moving rail onto the left side of the headrail.

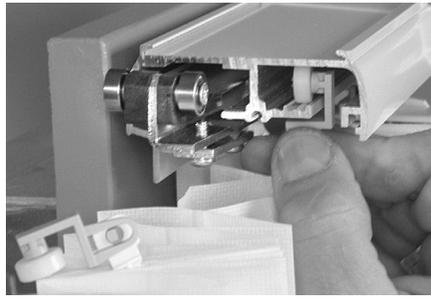


2. Slide the rail clips onto the appropriate front track in the headrail.
  - 3/4" fabric – back groove




3/4" Fabric Back Groove

3. Slide the left moving rail bracket into the headrail.

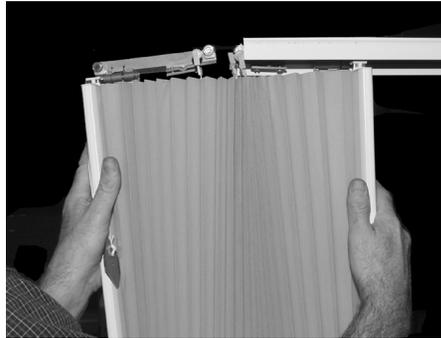


4. Install the left end plate.

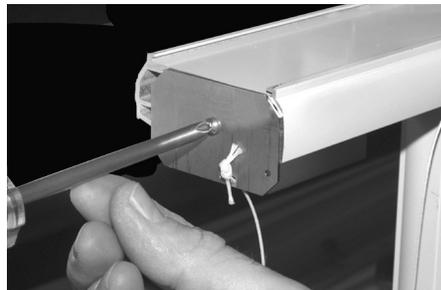

## Inside Mount – Headrail Installation

### Partially Attach The Valance Clips


Place the valance clips into the headrail. Keep a minimum of 3" between the end of the headrail and the valance clips. Be sure to avoid areas where the headrail attaches to the mounting brackets.

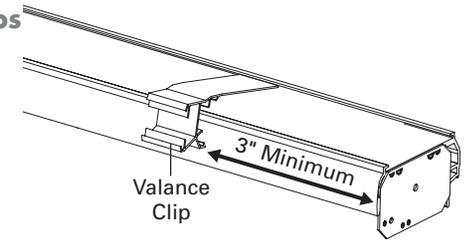

Note: Do NOT snap the valance clips completely onto the front of the headrail. Leave the end of the valance clip as shown. You will snap the end of the valance clip on later.


### Install The Headrail

- Gather up all the rails and fabric as one unit.
- Hold the headrail parallel to the installation brackets. The front of the brackets should be under the front groove on the top of the rail.

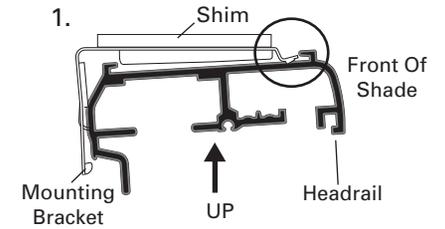



1) Push the headrail straight up.

2) Slide the headrail into the brackets until they click.

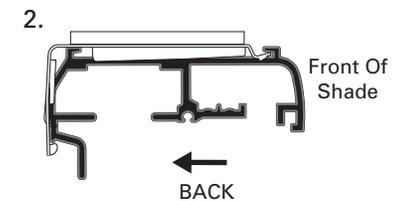

6. Install the cord tensioner.
  - Unwind the cord and spring from the right end plate.
  - Slide the cord tensioner into the channel at the front of the headrail.
  - Attach the right end plate.

Note: You will adjust the cord tensioner later.

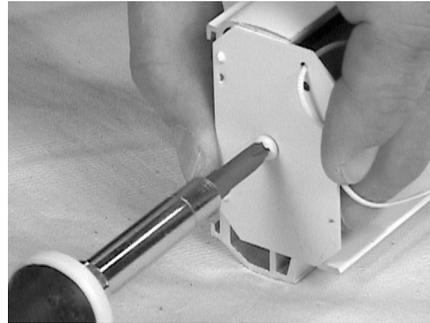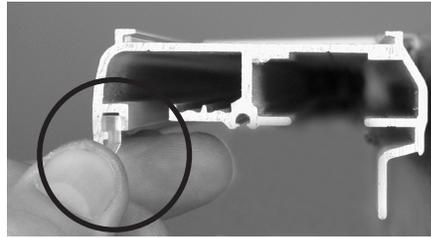

7. Attach the other end plate.


## TRADITIONAL MOUNT – HEADRAIL INSTALLATION

### Outside Mount – Headrail Installation

#### Install The Headrail


Note: The headrail will not slide in the mounting brackets once installed.

- Measure and mark the centerpoint on the mounting surface.
- Measure and mark the headrail's centerpoint.
- Gather up all the rails and fabric as one unit.
- Align the headrail mark to the matching mark on the mounting surface, then install.
  - ~ Slip the headrail into the installation brackets so the front of the bracket slides under the front groove on the top of the rail.
  - ~ Gently roll the back of the headrail up and push back to snap into place.

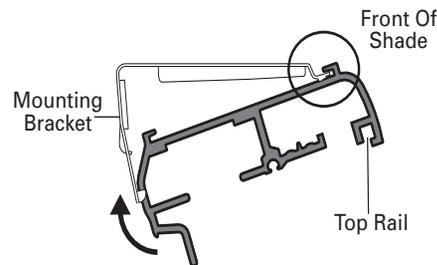


5. Install the cord tensioner.
  - Unwind the cord and spring from the right end plate.
  - Slide the cord tensioner into the channel at the front of the headrail.
  - Attach the right end plate.


Note: You will adjust the cord tensioner later.

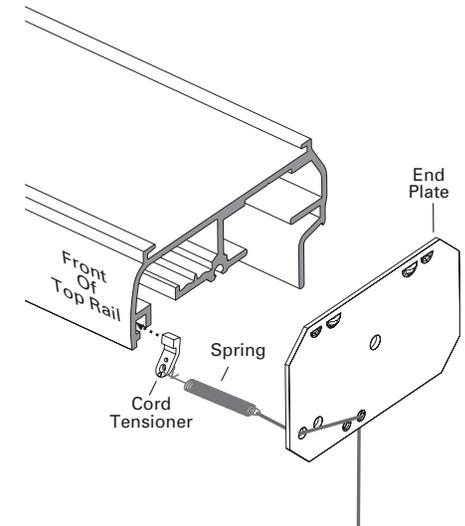


#### Split Stack




1. Remove the left end plate from the headrail.

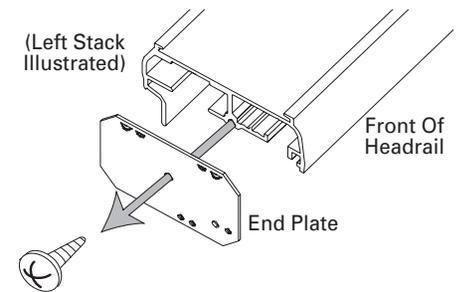



2. Insert the center pull plate in the center channel and screw in at the center point of the headrail. (The illustration at right references the placement of the center pull plate in the center groove. It still needs to be centered in the headrail before screwing down.)

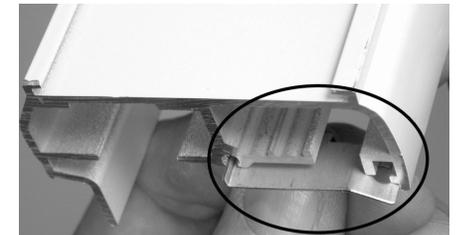

3. Pick up the left set of rails and fabric and slide the rollers of the moving rail bracket onto the rear track of the headrail.

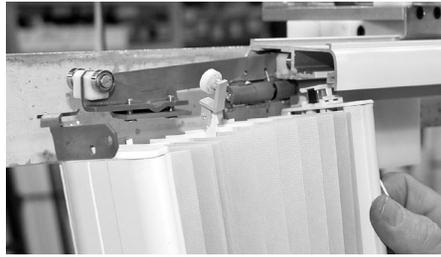


4. Slide the rail clips onto the appropriate front track in the headrail.
  - 3/4" fabric – back groove

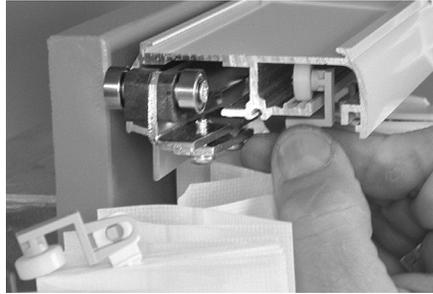

3/4" Fabric  
Back Groove


5. Install the stationary rail.
  - The stationary rail bracket has two slots at the top. The back tracks of the headrail fit into these slots.
  - Insert the bracket into the back track of the headrail as shown. Twist the rail to lock it in place.

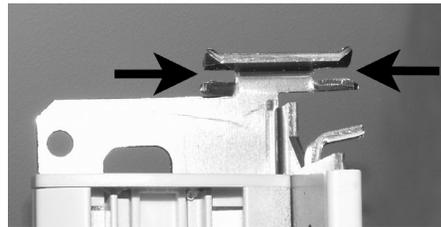

Top Of Stationary Rail Bracket



5. Install the stationary rail (Left/Right Stack and Split Stack).
  - The stationary rail bracket has two slots at the top. The back tracks of the headrail fit into these slots.

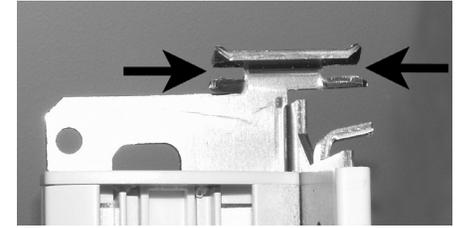


- Insert the bracket into the back track of the headrail as shown. Twist the rail 90° to lock it in place.



- Make sure the bracket aligns with the end of the headrail.


Note: It may be necessary to use a screwdriver and mallet to move the bracket to the end of the headrail.

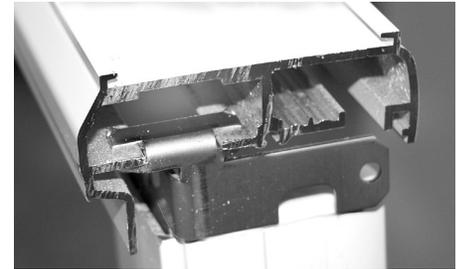

6. Attach the stationary rail side end plate.




1. Remove the end plate from the stationary side of the headrail, if attached. For a Left Stack, remove the left end plate; for a Right Stack, remove the right end plate.

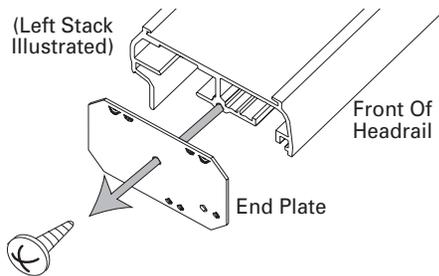

### Split Stack



2. Insert the center pull plate in the center channel and screw in at the center point of the headrail. (The illustration at right references the placement of the center pull plate in the center groove. It still needs to be centered in the headrail before screwing down.)

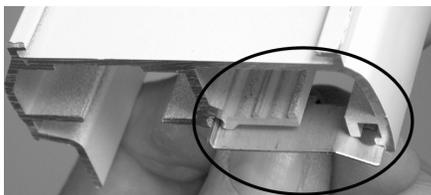

3. Gather all the rails and fabric and slide the rollers of the moving rail bracket onto the rear track of the headrail.




4. Slide the rail clips onto the appropriate groove in the front track.
  - 3/4" fabric – back groove

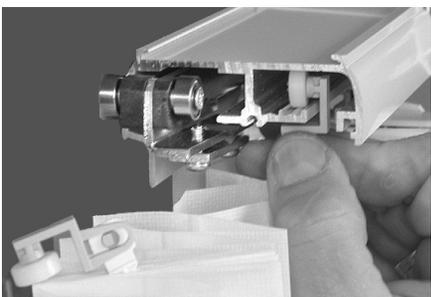

3/4" Fabric Back Groove

- Make sure the bracket aligns with the end of the headrail.


Note: It may be necessary to use a screwdriver and mallet to move the bracket to the end of the headrail.

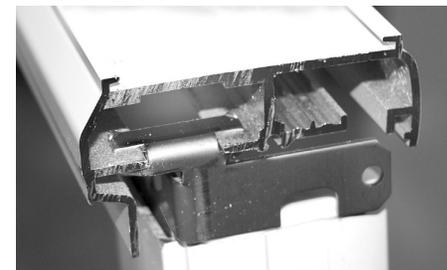


6. Install the left end plate.



7. Install the right fabric panel and stationary rails using the previously described process (Steps 3 - 6).

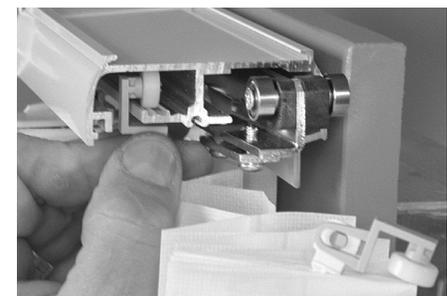

8. Install the cord tensioner.
  - Unwind the cord from the end plate.
  - Slide the cord tensioner into the channel at the front of the headrail.

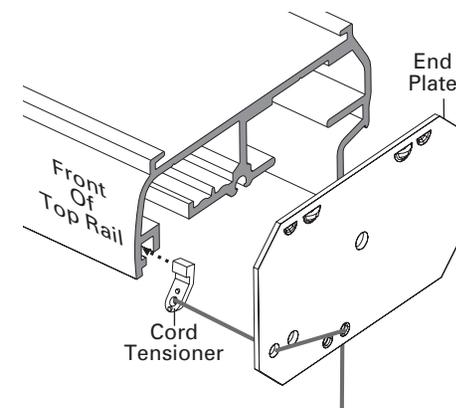


9. Attach the right end plate.
 

Note: You will adjust the cord tensioner later.


## OUTSIDE MOUNT — STATIONARY RAIL BOTTOM BRACKET ATTACHMENT

### Secure The Stationary Rails

#### Side Stack (Left And Right) And Split Stack



- Use a carpenter's level to ensure that the stationary rail is exactly vertical when viewed from both the front and the side.
- Secure the screw through the bracket and into the mounting surface.
- You may use an extension bracket to mount the stationary rail away from the wall. An extension bracket may be necessary if you used spacer

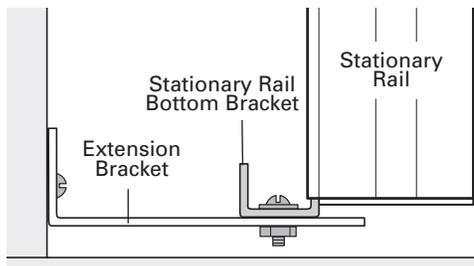

(Side View)



blocks with the mounting brackets.

Go to page 43 for Final Adjustments.

## Assemble The Moving Rail(s)

### Side Stack (Left And Right)

Insert the moving rail bracket into the moving rail.


- If attached, remove the snap pin located in the moving rail.
- Slide the moving rail bracket into the moving rail.
- Replace the snap pin through both the moving rail and the moving rail bracket.



### Center Stack

Insert both moving rail brackets into the moving rails.


- Remove both snap pins located in each moving rail.
- Slide the moving rail bracket into the moving rail.
- Replace the snap pins through both the moving rail and the moving rail bracket.

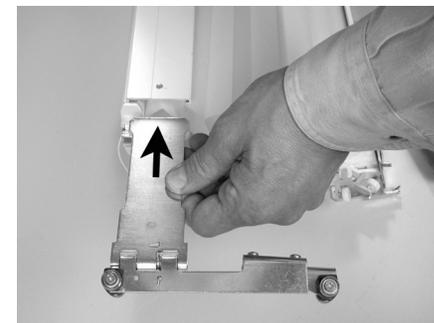

### Split Stack

Insert both moving rail brackets into the moving rails (as shown above).

- Remove both snap pins located in each moving rail.
- Slide the moving rail bracket into the moving rail.
- Replace the snap pins through both the moving rail and the moving rail bracket.

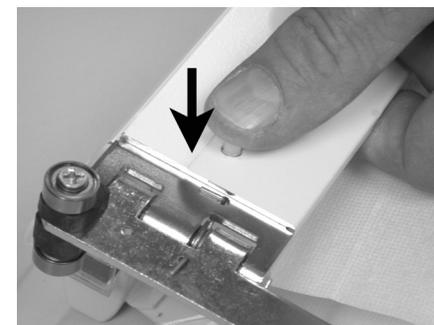

## TRADITIONAL MOUNT — BRACKET INSTALLATION

Note: For Outside Mounts: Follow the instructions on page 8-9, for installing the installation brackets.

Note: For Inside Mounts: Follow the instructions on page 20-21 for installing the installation brackets.


Note: Larger installations will require two people.

## TRADITIONAL MOUNT — RAIL PREPARATION

### Prepare the Rails

Gather and layout all the components for installation on a clean, cloth covered surface.


#### Side Stack (Left And Right) And Split Stack



#### Install The Stationary Rail Bottom Bracket

Note: Do not insert the bracket completely. Leave at least 1/4" of the bracket showing below the stationary rail.

Insert the stationary rail bottom bracket into the bottom of the stationary rail. (For split stack, insert a bottom bracket into each stationary rail.) The base of the bottom bracket should extend toward the window.

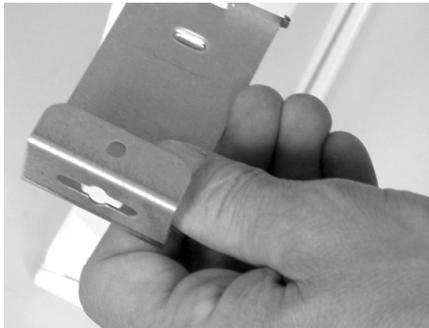

Note: Do not attach the bracket to the mounting surface at this time.




# INSIDE AND CEILING MOUNT INSTALLATION

# INSIDE MOUNT – BRACKET INSTALLATION

## Mount The Brackets

### Bracket Spacing


- Measure and mark where to attach the installation brackets. Place installation brackets 8" in from the ends of the shade.
- Space additional brackets evenly between the two end brackets.

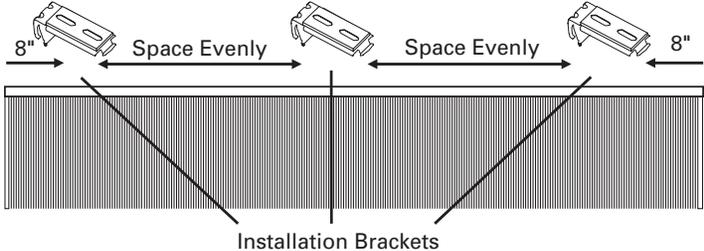

### Attach the Bracket Shim


- Attach the shim to the top of the mounting bracket. It snaps on and is held in place by the screw holes.

Note: The shim is necessary for the valance installation.

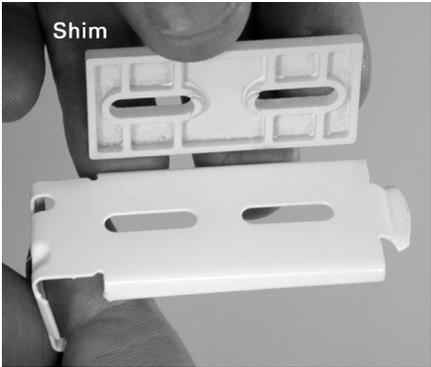

- Mount each bracket with an attached shim at the previously marked location.


- Use a carpenter's level to ensure that the brackets are level and aligned.

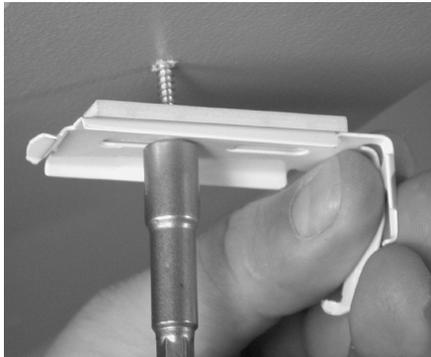

# TRADITIONAL (ON THE FLOOR) INSIDE AND OUTSIDE MOUNT INSTALLATION

### Inside Mount/Ceiling Mount

- Position the installation brackets so the tops of the brackets attach to a flat horizontal surface.
- Measure and mark all bracket locations. Use the chart below for your measurements.
- Use a carpenter's level to ensure that the brackets are level and aligned.

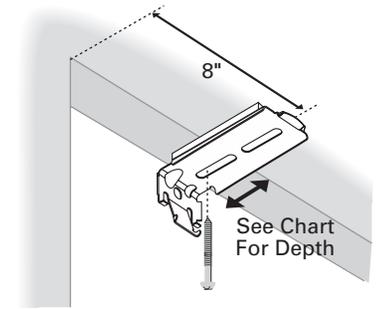



Note: When mounting to drywall, you must use a wall anchor.

Fabric Pleat Size	Valance Type	Minimum Depth Required For Inside Mount	Minimum Depth Required For Fully Recessed Mount
¾"	Aluminum	¾"	3 <sup>5</sup> / <sub>8</sub> "



## Install The Components Into The Headrail

### Side Stack - Left Stack

See the illustration at right for the order of components as they are installed in the headrail.

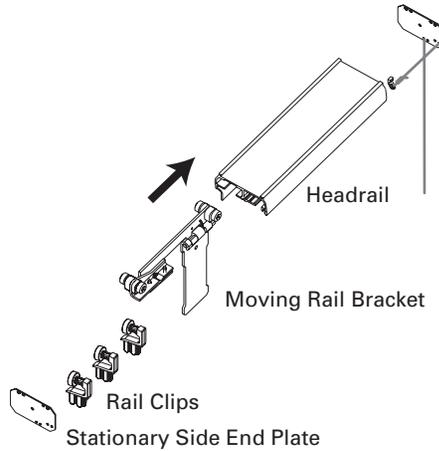

1. Detach the rail clips from the fabric clips. To detach, twist the rail clip while holding the base of the fabric clip in place.

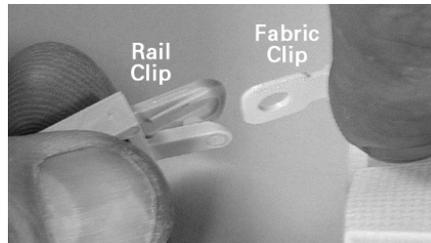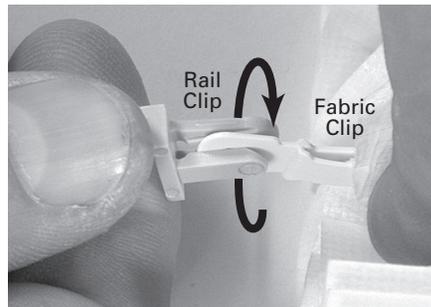


Note: Should the rail clip become slightly open, gently squeeze the prongs back together.



## INSIDE MOUNT — STATIONARY RAIL BOTTOM BRACKET ATTACHMENT

### Secure The Stationary Rail(s)

### Side Stack (Left And Right) And Split Stack



- Use a carpenter's level to ensure the stationary rail is exactly vertical when viewed from both the front and the side.
- Secure the screw through the bracket and into the bottom of the mounting surface. See the next step if you ordered your shade with a cut-out or you prefer to secure the rail to the side.



Use the inside mount adaptor to secure the stationary rail to the side of the casement.


Note: If you ordered your shade with a cut-out, such as for baseboards or other obstructions, you must use the inside mount adaptor.

- Align the screw hole of the adaptor to face the window casement (or wall). Slide the inside mount adaptor onto the stationary rail bottom bracket.
- Secure a screw through the inside mount adaptor and into the casement.





## Attach The Fabric Clips To The Rail Clips In The Headrail

### Side Stack (Left And Right), Split Stack, And Center Stack



Insert the top of each fabric clip into the corresponding rail clip (located in the headrail).

Note: For split stack shades, repeat this step for the right fabric panel

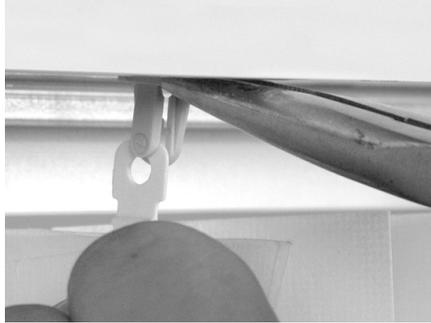


### Center Stack Shades:

Center Stack Shades have no stationary rails. Go to page 43 for Final Adjustments.

## Verify The Stationary Rail Is Flush Against the End Plate


The Stationary Rail must be flush against the Stationary Rail End Plate.

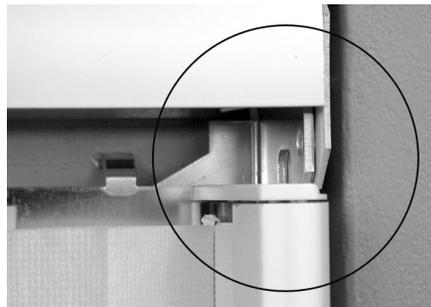


- If necessary, place the tip of a screwdriver against the top of the bracket and tap it gently with a hammer.



2. Remove the end plate, which is loosely attached to the left (stationary) side of the headrail.

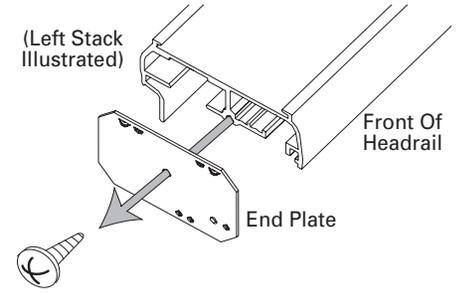


3. From the left side of the headrail, slide the moving rail bracket into the back track of the headrail with the back of the bracket going in first.

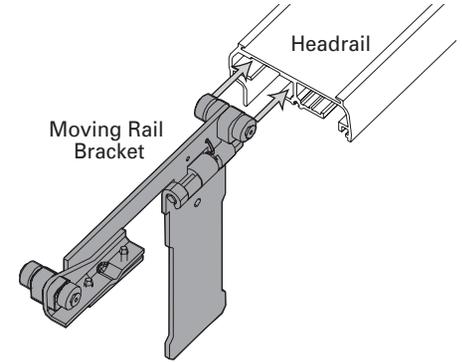

4. Insert all the rail clips into the front track of the headrail.


Slide the rail clips onto the appropriate groove in the front track.

- 3/4" fabric – back groove




3/4" Fabric Back Groove


5. Attach the stationary rail side end plate to the headrail.

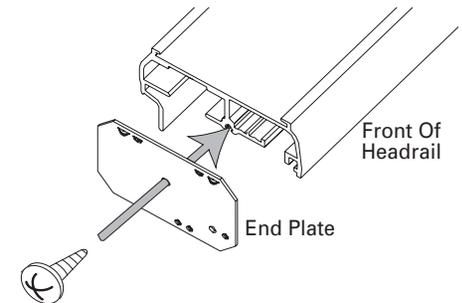

- Unwind the cord wrapped around the right end plate. The cord tensioner is attached to the end of the cord.

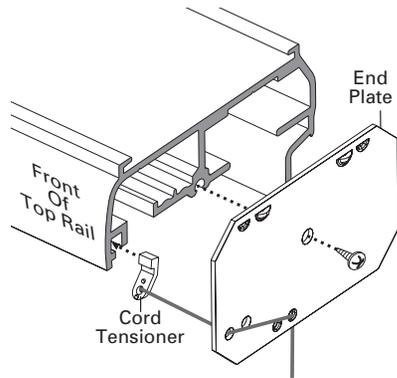



- Slide the cord tensioner down the cord tensioner slot on the right end of the headrail.

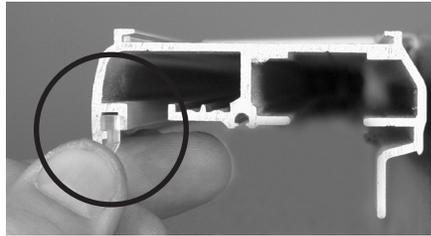

- Screw the right end plate onto the headrail.


### Side Stack - Right Stack

Follow the steps starting on page 22, except install the components on the right side of the shade and the cord tensioner on the left side of the shade. See the illustration at right for the order of components as they are installed in the headrail.

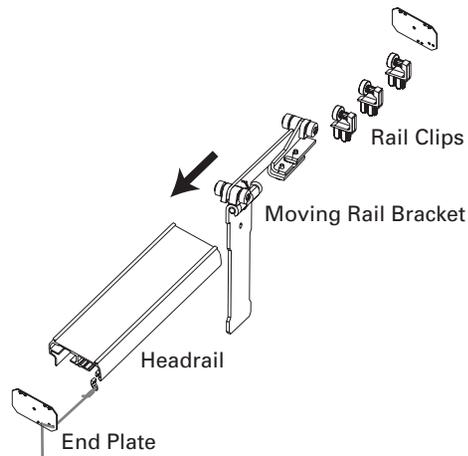


## Install The Moving Rail Bracket(s)

### Side Stack (Left And Right), Split Stack, And Center Stack




Slide the moving rail bracket (located in the headrail) into the moving rail.

- Remove the snap pin, located in the moving rail or loose in the parts bag.

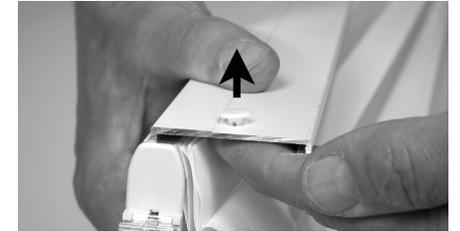

- Slide the moving rail bracket into the moving rail.

Note: The moving rail bracket is hinged to allow easier access for attaching it to the moving rail.

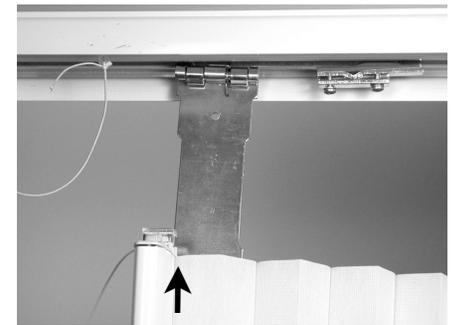


- Replace the snap pin through both the moving rail and the moving rail bracket.

Note: For center stack and split stack shades, repeat this step for the right moving rail.




## Install The Vertical Rails

### Side Stack (Left And Right) And Split Stack




### Install The Stationary Rail(s)

1. Side Stack: Pick up all the rails and fabric as one unit.  
Split Stack: Pick up all the left panel rails and fabric as one unit, repeat with the right panel of rails and fabric.

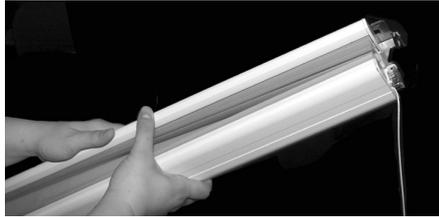

2. Install the stationary rail.
  - The stationary rail bracket has two slots at the top. The back tracks of the headrail fit into these slots.
  - Insert the bracket into the back track of the headrail. Twist the rail 90° to lock it in place.

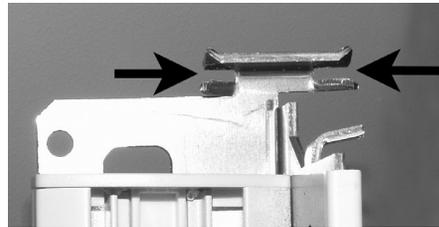


Top Of Stationary Rail Bracket




Tip: Install the stationary rail as close to the end of the headrail as possible.


### Center Stack




Follow the steps starting on page 22. See the illustration at right for the order of components as they are installed in the headrail.

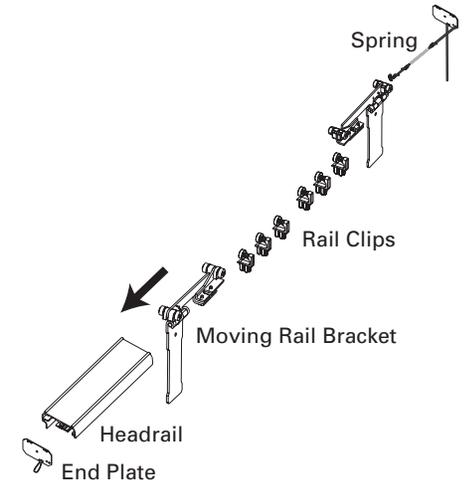

### Split Stack




Follow the steps starting on page 22. See the illustration at right for the order of components as they are installed in the headrail.

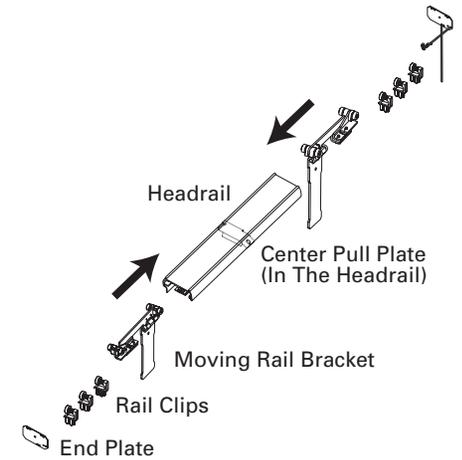

## INSIDE MOUNT – HEADRAIL INSTALLATION

### Partially Attach The Valance Clips


Place the valance clips into the headrail. Keep a minimum of 3" between the end of the headrail and the valance clips. Be sure to avoid areas where the headrail attaches to the mounting brackets.

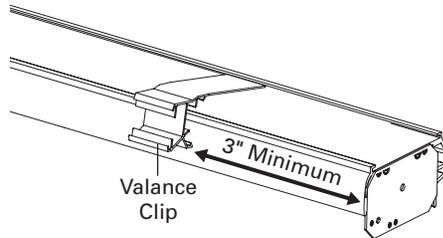

**Note:** Do NOT snap the valance clips completely onto the front of the headrail. Leave the end of the valance clip as shown. You will snap the end of the valance clip on later.


### Install The Headrail

- Hold the headrail parallel to the installation brackets. The front of the brackets should be under the front groove on the top of the rail.

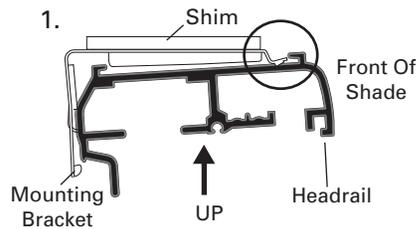

1) Push the headrail straight up.


2) Slide the headrail into the brackets until they click.

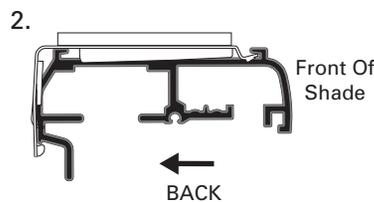

## INSIDE MOUNT – VERTICAL RAILS INSTALLATION

### Preparing The Vertical Rails

#### Side Stack (Left And Right) And Split Stack




#### Install The Stationary Rail Bottom Bracket

**Note:** Do not insert the bracket completely. Leave at least 1/4" of the bracket showing below the stationary rail.

Insert the stationary rail bottom bracket into the bottom of the stationary rail. (For split stack, insert a bottom bracket into each stationary rail.) The base of the bottom bracket should extend toward the window.

**Note:** Do not attach the bracket to the mounting surface at this time.

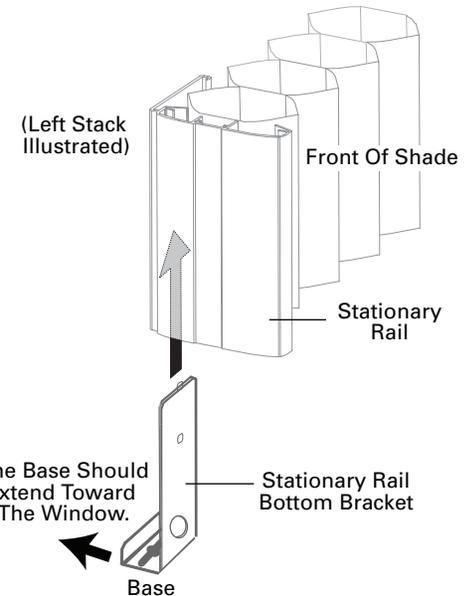

#### Center Stack

Center Stack shadings do not have stationary rails. Skip this section and go to page 29, Install The Moving Rail Bracket(s).

